

Towards Learning Efficient Maneuver Sets for Kinodynamic Motion Planning

Aravind Sivaramakrishnan, Zakary Littlefield and Kostas E. Bekris*

Introduction

Planning for systems with dynamics is challenging as often there is no local planner available and the only primitive to explore the state space is forward propagation of controls. In this context, tree sampling-based planners (LaValle and Kuffner 2001; Karaman and Frazzoli 2011; Webb and van Den Berg 2013) have been developed, some of which achieve asymptotic optimality by propagating random controls during each iteration (Li, Littlefield, and Bekris 2016). While desirable for the analysis, random controls result in slow convergence to high quality trajectories in practice.

This short position statement first argues that if a kinodynamic planner has access to local maneuvers that appropriately balance an exploitation-exploration trade-off, the planner’s per iteration performance is significantly improved. Exploitative maneuvers drive the system to the goal as fast as possible given local obstacle and heuristic information. Exploration maneuvers allow the system to move in a variety of different directions so as to deal with situations that the heuristic does not provide good guidance. Generating such maneuvers during planning can be achieved by curating a large sample of random controls. This is, however, computationally very expensive. If such maneuvers can be generated fast, the planner’s performance will also improve as a function of computation time.

Towards objective, this short position statement argues for the integration of modern machine learning frameworks with state-of-the-art, informed and asymptotically optimal kinodynamic planners (Littlefield and Bekris 2018). The proposed approach involves using neural networks to infer local maneuvers for a robotic system with dynamics, which properly balance the above exploitation-exploration trade-off. In particular, a neural network architecture is proposed, which is trained to reflect the choices of an online curation process, given local obstacle and heuristic information. The planner uses these maneuvers to efficiently explore the underlying state space, while still maintaining desirable properties. Preliminary indications in simulated environments and systems are promising but also point to certain challenges that motivate further research in this direction.

*The authors are with the Department of Computer Science, Rutgers University, Piscataway, New Jersey, 08854, USA. Email: {as2578, zw12, kb572}@rutgers.edu

Problem Setup

Consider a robot with a state space \mathbb{X} - divided into a collision-free \mathbb{X}_f and obstacle subset \mathbb{X}_{obs} - and a control space \mathbb{U} , which respects dynamics of the form: $\dot{x} = f(x, u)$, where $x \in \mathbb{X}$ and $u \in \mathbb{U}$. The process f can be an analytical ordinary differential equation or modeled via a physics engine.

We will refer to a finite set of piecewise-constant controls u , each of them propagated for a specified time duration t as a *maneuver set*, or U . When a sequence of maneuvers are executed one after the other, they define a *plan*. A plan of length T induces a trajectory $\pi \in \Pi$ where $\pi : [0, T] \rightarrow \mathbb{X}_f$.

Each trajectory has a cost C according to function cost : $\Pi \rightarrow \mathbb{R}^+$. The solution trajectory must minimize this cost. A useful technique that aids in finding solutions very quickly is the heuristic function, $h(x)$, which provides guidance towards the goal set \mathbb{X}_G . This function is assumed to be an admissible and consistent estimate of the cost to go from every state in \mathbb{X}_f to the goal.

For kinodynamic planning problems, it has been shown that propagating random controls at every state and appropriately selecting which state is expanded can guarantee asymptotic optimality (Li, Littlefield, and Bekris 2016; Hauser and Zhou 2016), i.e., the cost C of the generated trajectory π approaches the optimum cost C^* with probability 1 as the number of iterations of the algorithm increase.

Motion planning with informed maneuvers

At a high-level, a sampling-based planner, such as RRT (LaValle and Kuffner 2001), builds a tree structure of states reachable from the start and follows a selection-propagation process to expand the tree until it intersects \mathbb{X}_f . During each iteration, a tree node is selected and a control is propagated from this state. Certain instances of this framework, such as SST (Li, Littlefield, and Bekris 2016), identify the conditions for asymptotic optimality (AO), which involves propagating random controls. More recent variants, such as DIRT (Littlefield and Bekris 2018), aim to computational efficiency by using a heuristic, while maintaining the AO property. The heuristic can be used to: a) promote selecting nodes closer to the goal, b) prune nodes that cannot provide a better solution than one already discovered and c) prioritize the propagation of maneuvers among random candidates, which bring the system closer to the goal.

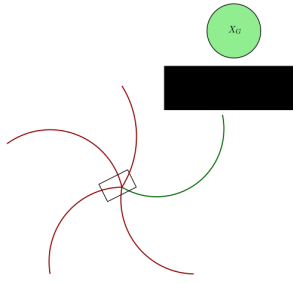


Figure 1: Maneuvers for a robot planning to reach X_G (green circle) behind an obstacle (black box). The exploitative control (green) greedily takes the system towards X_G . The explorative controls (red) attempt to provide coverage.

One way that the DIRT algorithm allows to use the heuristic, while maintaining AO, is that it employs a set of informed maneuvers at each state, which are propagated first when the corresponding node is selected, and then it reverts to propagating random controls from the corresponding state. A key question in this context is how to generate the set of informed maneuvers so as to improve the efficiency of the planner relative to using just random controls. A promising way is to compute maneuver sets at each state is to balance exploitation and exploration. These maneuver sets can either be computed online, as we do in this work, or pre-computed motion primitives can be used. (Pivtoraiko and Kelly 2011) On one hand, exploitation maneuvers should guide the system as much as possible towards the goal given local heuristic information. On the other hand, exploration maneuvers should drive the system in a diverse set of states to discover alternative paths when the heuristic guidance is incorrect.

This section describes a naive and computationally expensive process for generating such maneuvers during the online operation of the planner. In particular, a sufficiently large set of random controls are first propagated from the selected state. This set of random controls is then curated to form a *curated maneuver set*, as outlined in Fig 1.

In more detail, a set of trajectories are generated by randomly sampling control sequences $U_{cand} = \{v_0, v_1, \dots, v_M\}$ and forward simulating each control for a specified duration from a given state to generate a trajectory set $\Pi_{cand} = \{\pi_0, \pi_1, \dots, \pi_M\}$. To determine the *exploitative trajectory* from the set Π_{cand} , the one that gets closest to the goal state without colliding with any obstacles is chosen:

$$\arg \min_{\pi_{new} \in \Pi_{cand}} h(\pi_{new}(T))$$

The control that generated this exploitative trajectory, u^0 is added to the curated maneuver set \hat{U} . The remaining $N-1$ *exploratory* controls u^1, \dots, u^N for the maneuver set \hat{U} are added incrementally. The set of trajectories that result from a given start state x using maneuver set \hat{U} is denoted by $\hat{\Pi}$. Among all the trajectories in Π_{cand} , the trajectory that maximizes a trajectory dispersion metric $d_\pi(\cdot, \cdot)$ from the previously selected trajectories in $\hat{\Pi}$ is added to $\hat{\Pi}$:


$$\arg \max_{\pi_{new} \in \Pi_{cand}} \min_{\pi \in \hat{\Pi}} d_\pi(\pi_{new}, \pi).$$

For generating the exploratory maneuvers, this work proposes to employ a metric similar to the one considered by Green and Kelly (Green and Kelly 2007). This previous approach uses a distance metric $d_\pi(\pi_1, \pi_2)$ to determine how similar two trajectories are to one another. The distance metric between trajectories considered here is an approximation of the area between two trajectories. Using this metric, it is possible to find trajectories that are sufficiently dispersed from one another to create a wide spanning set of trajectories. While the prior work (Green and Kelly 2007) aimed to create a single set of trajectories offline that would solve a wide variety of problems, the approach here is used to generate a set of controls that is tailored to each state of the robot during planning that is selected for propagation. This strategy provides good adaptability to the environment and is appropriate for robots with high order dynamics where a single offline maneuver set may not be expressive enough to solve most motion planning queries.

	Iteration	Comp. Time	Path Cost
Random	1471	0.2	50.47
Curated	686	12.15	48.13

Table 1: Statistics for finding the first solution path between DIRT using random and curated maneuvers.

Table 1 studies the behavior of the DIRT planner with randomly generated and curated maneuvers. Though the curated procedure is very effective in finding a high-quality solution and can do so very fast in terms of a per iteration performance, the computational cost of generating the curated maneuver set online quickly becomes prohibitive. Hence, it is desirable to develop an approach that achieves the same objective as the curation but can generate the maneuvers fast. The curated planner can be used to generate a dataset of curated maneuvers for a robot in a simulated environment. Then, data-driven machine learning techniques can be employed to learn how to generate maneuver sets online at a similar computational cost to selecting random controls.



(a) Example o_{local} . The light region represents X_f , while the dark region represents X_{obs} .



(b) Example h_{local} . The lighter regions are regions of decreasing heuristic magnitude.

Figure 2: Examples of o_{local} and h_{local} . In both cases, the project of the robot state x_c in the workspace has been marked with an \times .

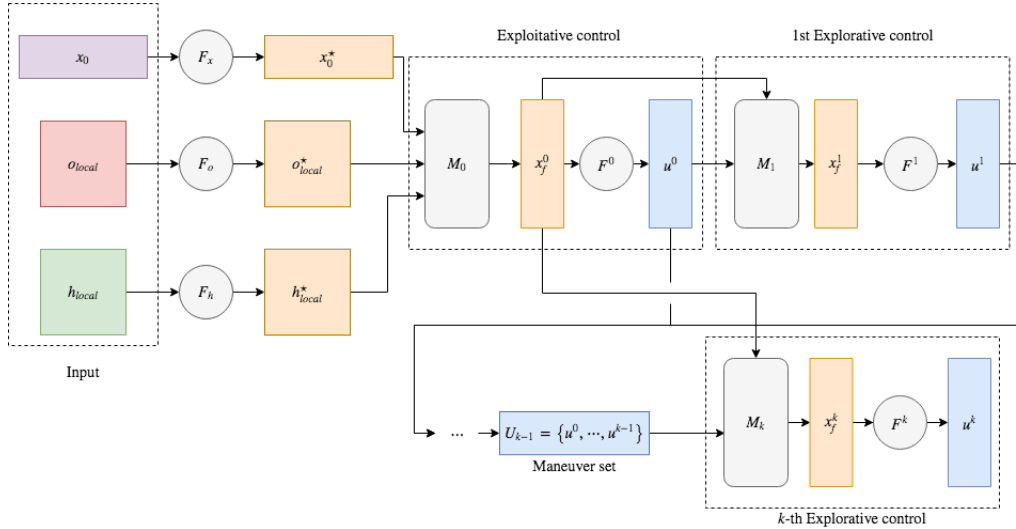


Figure 3: Computation graph of $U_k = \hat{f}(x_0, o_{local}, h_{local})$. For $k = N, U_k = \hat{U} = \{u^0, \dots, u^N\}$.

Learning promising maneuvers

The new objective is to learn a maneuver set $\hat{U} = \{u^0, u^1, \dots, u^N\}$, where u^0 is the exploitative control, and u^1, \dots, u^N are the exploratory ones. Any control $u^k \in U$ must aid the planner in finding a collision-free trajectory π from the currently selected state x_c to the desired goal x_G .

The input to the learning process is constructed as follows. First, a regular set of points \mathbb{X}_{local} in the vicinity of x_c are collision checked to generate a binary 2D image $o_{local}(x_c)$ indicating the presence of obstacles in the workspace (currently the focus is on navigation challenges, where the workspace projection has a major impact on the collision properties of robot states). The heuristic $h(x)$ is also evaluated at each $x \in \mathbb{X}_{local}$, resulting in a 2D matrix $h_{local}(x_c)$. Examples of o_{local} and h_{local} are shown in Fig 2.

In addition to x_c , providing h_{local} as input to the model helps bias the model to predict an exploitative control u^0 that takes the system closer to the goal. The o_{local} map is used as input to discourage the model from generating controls that may steer the robot in directions where obstacles are present.

Figure 3 highlights the proposed architecture. The non-convex functions F_x, F_o, F_h , represented by multi-layered neural networks, act on the initial state x_c (or x_0 in the image), the local obstacle information o_{local} , and the local heuristic gradient h_{local} respectively, to produce the high-level feature representations x_0^*, o_{local}^* and h_{local}^* . An operator $M_0(x_0^*, o_{local}^*, h_{local}^*)$ then produces a feature vector x_f^0 , from which the first exploitative control u^0 is obtained as $u^0 = F^0(x_f^0)$, where F^0 is also a non-convex function represented as a multi-layered neural network.

Once the first exploitative control is obtained, the remaining N exploratory controls are obtained as follows.

$$x_f^k = M_k(x_f^0, U_{k-1}) \quad (1)$$

$$u^k = F^k(x_f^k) \quad (2)$$

where for all $k \geq 1, U_k = \{u^0, u^1, \dots, u^{k-1}\}$, M_k is an operator that acts on x_f^0 and U_{k-1} to produce a feature vector

x_f^k , and u^k is obtained as above. In this work, F^k is a multi-layered neural network. For the exploitative control ($k = 0$), U_{k-1} is the empty set.

In the experiments, the functions F^0, \dots, F^N are all multi-layered perceptrons with one hidden layer activated by the Rectified Linear Unit (ReLU) activation function and one output layer. The operator M_k is chosen to be a simple concatenation operator. The operators M_1, \dots, M_N drop the learned heuristic representation h_{local}^* as it is not useful in predicting explorative controls. Two types of networks are considered in the experiments: FC and CONV, which use fully connected layers and convolutional layers respectively for the functions F_o and F_h .

Evaluation

The evaluation considers a treaded vehicle with dynamics from the literature (Pentzer, Brennan, and Reichard 2014). The state space is 5 dim., corresponding to SE(2) augmented by the steering angle and the forward velocity state variables. The controls are 2 dim. and correspond to the accelerations on the left and right treads.

For training, obstacles are randomly placed in a 2 dim. workspace so they cover one-third of the reachable workspace. The DIRT planner (Littlefield and Bekris 2018) is executed with the online curation procedure on multiple problem instances in such workspaces. The Euclidean distance between two points in the workspace is used as the heuristic function, and the duration of the solution trajectory as the cost function. For each node x_c the planner selects to propagate, the training process stores the o_{local} and h_{local} maps, as well as a maneuver set \hat{U} of size 5 (1 exploitative control and $N = 4$ exploratory controls). This maneuver set is curated from a set of 1000 randomly sampled maneuvers. Two environments are considered: a simple environment where the heuristic guides the robot effectively to the goal (Greedy), and an adversarial environment where acting greedily does not enable the robot to reach the goal (Explore). These environments are illustrated in Fig 4.

Algorithm	NumSolns	FirstSolnIters	FirstSolnCost	FinalSolnIters	FinalSolnCost
DIRT - Random	30	3446.67	59.64	23277.57	49.44
DIRT - FC (Exploit)	30	2246.67	56.54	17050.37	49.89
DIRT - FC (All)	30	620	47.58	16921.5	45.47
DIRT - Conv (Exploit)	30	3366.67	65.03	27774.67	48.38
DIRT - Conv (All)	30	2006.67	54.8	25671.07	48.16

Table 2: Solution statistics for Greedy. All values are averaged over NumSolns. Best values highlighted in bold.

Algorithm	NumSolns	FirstSolnIters	FirstSolnCost	FinalSolnIters	FinalSolnCost
DIRT - Random	30	15666.67	163.60	33254.13	149.47
DIRT - FC (Exploit)	29	12000	155	31794.86	140.06
DIRT - FC (All)	30	18766.67	133.83	28119.66	130.92
DIRT - Conv (Exploit)	29	27666.67	182.16	39924.96	172.14
DIRT - Conv (All)	30	14066.67	143.71	28194.83	139.43

Table 3: Solution statistics for Explore. All values are averaged over NumSolns. Best values highlighted in bold.

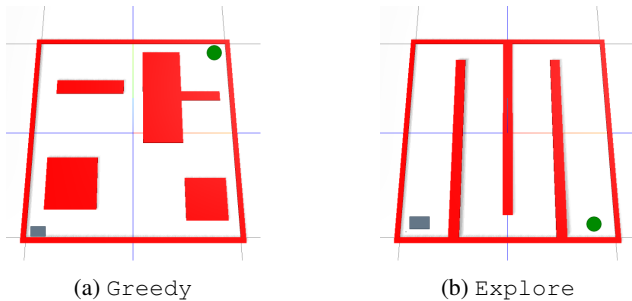


Figure 4: Environments: The grey rectangle is the starting pose of the robot (facing right) and the green circle is the goal region. The robot must avoid the red obstacles.

Tables 2 and 3 compare the performance of DIRT (after 50k iterations) for the following maneuvers: a) random (DIRT - Random), b) exploitative control predicted either by a Fully Connected (DIRT - FC (Exploit)) or a Convolutional network (DIRT - Conv (Exploit)), and c) both exploitative and explorative controls are predicted by the networks ((DIRT - FC (All), DIRT - Conv (All))). The following metrics are measured: (a) success rate over 30 experiments (NumSolns), (b) in how many iterations does the planner find a solution (FirstSolnIters) and of what quality (FirstSolnCost), and (c) similar statistics for the final solution (FinalSolnIters, FinalSolnCost).

DIRT - FC (All) obtains the highest quality solution. The number of iterations required for the best solution is also the lowest for DIRT - FC (All), while the iterations required for the first solution is lower for DIRT - FC (Exploit) in the Explore environment and DIRT - FC (All) in the Greedy environment. Using only the exploitative control affects the online performance of the planner in the Explore environment, where it is not able to find a solution in every run.

Discussion

There are indications that the learned maneuvers guide the vehicle to the goal effectively but frequently result in collisions, which partly degrades performance. An improved learning process is necessary to increase the rate of collision-free maneuvers. Furthermore, the current cost of network inference is more expensive than returning a random con-

trol. This makes the fully connected network return the first path in similar time to random maneuvers, while the convolutional network takes significantly longer. No special purpose hardware, however, was used for the current experiments, such as GPUs, which can speed up network inference. The effectiveness of the exploration controls could be further improved by considering not only the controls propagated at the current state but also the tree nodes in the vicinity of the propagation. As the proposed pipeline is scaled to higher dimensional systems, more complex environments and realistic sensing input, there are additional considerations related to data efficiency and uncertainty that must be mitigated.

References

- Green, C. J., and Kelly, A. 2007. Toward optimal sampling in the space of paths. In *ISRR*, 281–292.
- Hauser, K., and Zhou, Y. 2016. Asymptotically optimal planning by feasible kinodynamic planning in a state–cost space. *IEEE Transactions on Robotics* 32(6):1431–1443.
- Karaman, S., and Frazzoli, E. 2011. Sampling-based Algorithms for Optimal Motion Planning. *IJRR* 30(7):846–894.
- LaValle, S. M., and Kuffner, J. J. 2001. Randomized Kinodynamic Planning. *IJRR* 20(5):378–400.
- Li, Y.; Littlefield, Z.; and Bekris, K. E. 2016. Asymptotically optimal sampling-based kinodynamic planning. *IJRR* 35(5):528–564.
- Littlefield, Z., and Bekris, K. E. 2018. Efficient and asymptotically optimal kinodynamic motion planning via dominance-informed regions. In *IROS*.
- Pentzer, J.; Brennan, S.; and Reichard, K. 2014. Model-based prediction of skid-steer robot kinematics using online estimation of track instantaneous centers of rotation. *Journal of Field Robotics* 31(3):455–476.
- Pivtoraiko, M., and Kelly, A. 2011. Kinodynamic motion planning with state lattice motion primitives. In *IROS*, 2172–2179. IEEE.
- Webb, D., and van Den Berg, J. 2013. Kinodynamic RRT*: Asymptotically Optimal Motion Planning for Robots with Linear Differential Constraints. In *ICRA*.